



## Metal Frame Mining Small Slurry Pump Paper Pulp Centrifugal Mortar Wear Resistant

Our Product Introduction

### Basic Information

- Place of Origin: Sichuan, China
- Brand Name: horizontal-slurrypump.com
- Certification: ISO9001
- Model Number: OEM
- Minimum Order Quantity: 1 set
- Price: USD500-5000/set
- Packaging Details: free fumigation export wooden box packaging
- Delivery Time: 25 working days after receiveing advance payment
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram, Paypal
- Supply Ability: 300 sets per month



### Product Specification

- Capacity: Max 800l/s
- Head: Max 130 M, 430ft
- Warranty: One Year
- Material: High Chrome Alloy And Rubber
- Solids Handle: Up To 3.5"
- Fuel: Motor
- Highlight: **horizontal centrifugal slurry pump**



for more products please visit us on [horizontal-slurrypump.com](http://horizontal-slurrypump.com)

## Product Description

### Metal Frame Mining Small Slurry Pump Paper Pulp Pump/ Centrifugal Mortar Pump Wear Resistant

#### Product Description

Unique wear-resistant design (structure, material), long service life of flow parts  
 Wide performance range, high efficiency  
 Different material to meet different working condition  
 Easy to maintain  
 Provide pump model selection service, free design

#### Details

1. Support frame:main part for supporting flow parts,connect with bearing plates on the two sides to form bearing assembly.
2. Pump casing:connect with support frame by 6 bolts,can rotate in 60°gap according to needs,impeller,protecting plate,pump cover installed inside,material is abrasion resistant,the impeller,pump casing and pump cover of this pump are same as 6PNL-30 vertical mud sand pump.
3. Split type pump casing with long pump cover(flat pump cover and long pump cover).one body pump casing is available also.
4. Shaft seal box:installed outside of protecting plate,seal assembly installed in it,it joints shaft sleeve,lubricating it with grease through grease fitting to prolong life time.

#### Application

Slurry pumps are suitable for transferring high-abrasive slurries containing solid particles. Our slurry pumps are widely used in industries, including metallurgy, mining, coal, power generation and environmental protection.






### Specification Data

Discharge Size:20mm~350mm  
 NPSH:0m~3m  
 Inlet Size:32mm~400mm  
 Allowed Max Particle Size:20 mm  
 Capacity:4 ~ 3000 m<sup>3</sup>/h  
 Seal Type:step-down dynamic seal  
 Head:10 ~ 130 m  
 Pump Weight:up to 3000kg  
 Maximal Efficiency:70%  
 RPM:1450 r/min

### Structure

ZJ系列卧式渣浆泵结构简图

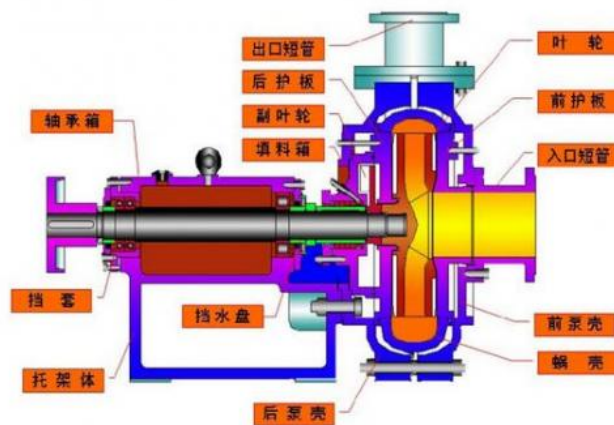


### Production Process



 **ROMAN** Beijing Silk Road Enterprise Management Services Co.,LTD

 0086-17773109286

 jeffreyth@slurrypump.com

 horizontal-slurrypump.com

Floor 5, 2nd Building, Zhonglu Industrial Zone, Shenzhen City, Guangdong Province China (Mainland)